Shininess the Future

上海善宇实业有限公司

Shanghai shininess Industrial Co., Ltd

Tel: +86-21-58545653

Fax: +86-21-58545652

E-mail: info@shininess.com

Website: www.shininess.com

www.shininess-home.com

善宇实业

SHININESS INDUSTRIAL

COB LED Downlight

Shanghai shininess Industrial Co., Ltd

www.shininess.com

Features:

- Use high quality COB LED
- Use high quality Lifud driver
- Different reflector cup are available
- Folding design
- Input voltage: AC110-130V or AC220-240V
- Color: Warm white, Natural white, Cool white
- Housing color: White, Black
- Housing material: Aluminum
- Warranty: 5 Years
- Installation: Surface Mounted

White cup

Black cup

Bright silver cup

Gun black cup

Rose golden cup

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Beam Angle	CCT
SNS-DL01A-15W	1pc COB	15W	1200Lm	110V/220VAC	Ø92*H100mm	24°	2700-6500K

Features:

- Use high quality COB LED
- PIR motion sensor function
- Different reflector cup are available
- Input voltage: AC110-130V or AC220-240V
- Color: Warm white, Natural white, Cool white
- Housing color: White, Black
- Housing material: Aluminum
- Warranty: 3 Years
- Installation: Surface Mounted

White cup

Gun black cup

Gun black cup

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Beam Angle	CCT
SNS-DL02A-12W	1pc COB	12W	960Lm	110V/220VAC	Ø95*H81mm	24°	2700-6500K

Features:

- Use high quality COB LED
- Use high quality driver
- Different reflector cup are available
- Input voltage: AC110-130V or AC220-240V
- Color: Warm white, Natural white, Cool white
- Housing color: White, Black
- Housing material: Aluminum
- Warranty: 3 Years
- Installation: Surface Mounted

Gun black cup

Rose golden cup

Bright silver cup

Black cup

White cup

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Beam Angle	CCT
SNS-DL03A-12W	1pc COB	12W	960Lm	110V/220VAC	Ø95*H81mm	24°	2700-6500K

IP65
IP Rating

Features:

- Use high quality COB LED
- Use high quality driver
- Different reflector cup are available
- Input voltage: AC110-130V or AC220-240V
- Color: Warm white, Natural white, Cool white
- Housing color: White, Black
- Housing material: Aluminum
- IP Grade: Waterproof IP65
- Warranty: 3 Years
- Installation: Surface Mounted

Black cup

White cup

Bright silver cup

Gun black cup

Rose golden cup

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Beam Angle	CCT
SNS-DL04A-8W	1pc COB	8W	640Lm	110V/220VAC	Ø102*H110mm	24°	2700-6500K
SNS-DL04A-12W	1pc COB	12W	960Lm	110V/220VAC	Ø102*H110mm	24°	2700-6500K

Features:

- Use high quality COB LED
- Use high quality driver
- Different reflector cup are available
- Input voltage: AC110-130V or AC220-240V
- Color: Warm white, Natural white, Cool white
- Housing color: White, Black
- Housing material: Aluminum
- Warranty: 3 Years
- Installation: Surface Mounted

Black cup

White cup

Bright silver cup

Gun black cup

Rose golden cup

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Beam Angle	CCT
SNS-DL05A-8W	1pc COB	8W	640Lm	100-240VAC	Ø102*H110mm	36°	2700-6500K

IP65
IP Rating

Bright silver cup

Rose golden cup

Black cup

Features:

- Use high quality COB LED
- Use high quality driver
- Different reflector cup are available
- Input voltage: AC110-130V or AC220-240V
- Color: Warm white, Natural white, Cool white
- Housing color: White, Black
- Housing material: Aluminum
- IP Grade: Waterproof IP65
- Warranty: 3 Years
- Installation: Surface Mounted

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Beam Angle	CCT
SNS-DL06A-15W	1pc COB	15W	1200Lm	110V/220VAC	Ø73*H108mm	45°/ 60°	2700-6500K
SNS-DL06A-20W	1pc COB	20W	1600Lm	110V/220VAC	Ø93*H118mm	45°/ 60°	2700-6500K
SNS-DL06A-30W	1pc COB	30W	2400Lm	110V/220VAC	Ø113*H136mm	45°/ 60°	2700-6500K
SNS-DL06A-40W	1pc COB	40W	3200Lm	110V/220VAC	Ø140*H150mm	45°/ 60°	2700-6500K

Features:

- Use high quality COB LED
- Use high quality driver
- Input voltage: AC110-130V or AC220-240V
- Color: Warm white, Natural white, Cool white
- Housing color: White, Black
- Housing material: Aluminum
- IP Grade: IP44
- Warranty: 5 Years
- Installation: Surface Mounted

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Beam Angle	CCT
SNS-DL08A-15W	1pc COB	15W	1650Lm	110V/220VAC	Ø110*H120mm	45°	2700-6500K
SNS-DL08A-20W	1pc COB	20W	2200Lm	110V/220VAC	Ø132*H152mm	45°	2700-6500K
SNS-DL08A-30W	1pc COB	30W	3300Lm	110V/220VAC	Ø170*H185mm	45°	2700-6500K

Tri-color

3000K 4000K 6000K

Features:

- Tri-color: 3000K-4000K-6000K
- Use high quality COB LED
- Use high quality driver
- Input voltage: AC110-130V or AC220-240V
- Color: Warm white, Natural white, Cool white
- Housing color: White, Black
- Housing material: Aluminum
- IP Grade: IP44
- Warranty: 5 Years
- Installation: Surface Mounted

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Beam Angle	Color
SNS-DL08T-15W	1pc COB	15W	1650Lm	110V/220VAC	Ø110*H120mm	45°	WW-NW-CW
SNS-DL08T-20W	1pc COB	20W	2200Lm	110V/220VAC	Ø132*H152mm	45°	WW-NW-CW
SNS-DL08T-30W	1pc COB	30W	3300Lm	110V/220VAC	Ø170*H185mm	45°	WW-NW-CW

Features:

- Use high quality COB LED, 90Lm/W
- Use high quality flicker free driver
- Anti-glare design
- Input voltage: AC100-240V
- Color: Warm white, Natural white, Cool white
- Housing color: White, Black
- Housing material: Aluminum
- IP Grade: Waterproof IP65
- Warranty: 3 Years
- Installation: Surface Mounted or Suspension

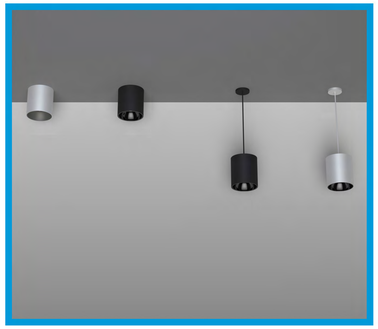

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Beam Angle	CCT
SNS-DL09A-10W	1pc COB	10W	900Lm	100-240VAC	Ø75*H100mm	40°	2700-6500K
SNS-DL09A-20W	1pc COB	20W	1800Lm	100-240VAC	Ø95*H152mm	40°	2700-6500K
SNS-DL09A-30W	1pc COB	30W	2700Lm	100-240VAC	Ø115*H152mm	40°	2700-6500K

IP65
IP Rating

Features:

- Use high quality COB LED, 115Lm/W
- Use high quality flicker free driver
- Anti-glare design
- Input voltage: AC100-240V
- Color: Warm white, Natural white, Cool white
- Housing color: White, Black
- Housing material: Aluminum
- IP Grade: Waterproof IP65
- Warranty: 5 Years
- Installation: Surface Mounted

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Beam Angle	CCT
SNS-DL10A-10W	1pc COB	10W	1150Lm	100-240VAC	Ø72*H95mm	24°/ 36°/ 40°	2700-6500K
SNS-DL10A-15W	1pc COB	15W	1700Lm	100-240VAC	Ø92*H105mm	24°/ 36°/ 40°	2700-6500K
SNS-DL10A-20W	1pc COB	20W	2300Lm	100-240VAC	Ø112*H115mm	24°/ 36°/ 40°	2700-6500K
SNS-DL10A-30W	1pc COB	30W	3450Lm	100-240VAC	Ø140*H120mm	24°/ 36°/ 40°	2700-6500K
SNS-DL10A-40W	1pc COB	40W	4600Lm	100-240VAC	Ø160*H145mm	24°/ 36°/ 40°	2700-6500K
SNS-DL10A-60W	1pc COB	60W	6900Lm	100-240VAC	Ø180*H165mm	24°/ 36°/ 40°	2700-6500K
SNS-DL10A-80W	1pc COB	80W	9200Lm	100-240VAC	Ø200*H185mm	24°/ 36°/ 40°	2700-6500K

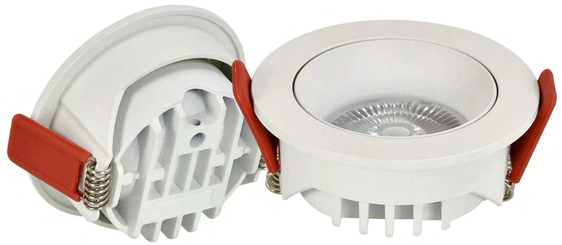

Features:

- Use high quality COB LED
- Round and Square shell are available
- Lighting effect: 110Lm/W
- Input voltage: AC110-130V or AC220-240V
- Color: Warm white, Natural white, Cool white
- CCT: 2700K, 3000K, 4000K, 6000K
- CRI: Ra80
- Housing color: White, Black
- Housing material: Aluminum
- Warranty: 3 Years
- Installation: Recessed

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Cut size	Beam Angle
SNS-DL301R-7W	1pc COB	7W	770Lm	110V/220VAC	Ø85*H35mm	Ø75mm	24°
SNS-DL301S-7W	1pc COB	7W	770Lm	110V/220VAC	L85*W85*H35mm	75*75mm	24°
SNS-DL301S-2X7W	2pcs COB	14W	1540Lm	110V/220VAC	L170*W85*H35mm	160*75mm	24°



Features:

- Use high quality COB LED
- Round and Square shell are available
- Anti-glare design
- Lighting effect: 110Lm/W
- Input voltage: AC110-130V or AC220-240V
- Color: Warm white, Natural white, Cool white
- CCT: 2700K, 3000K, 4000K, 6000K
- CRI: Ra80
- Housing color: White, Black
- Housing material: Aluminum
- Warranty: 3 Years
- Installation: Recessed

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Cut size	Beam Angle
SNS-DL302R-10W	1pc COB	10W	1100Lm	110V/220VAC	Ø85*H66mm	Ø75mm	24°
SNS-DL302S-10W	1pc COB	10W	1100Lm	110V/220VAC	L85*W85*H66mm	75*75mm	24°
SNS-DL302S-2X10W	2pcs COB	20W	2200Lm	110V/220VAC	L168*W85*H66mm	155*75mm	24°

Features:

- Use high quality COB LED
- Round and Square shell are available
- Lighting effect: 110Lm/W
- Input voltage: AC110-130V or AC220-240V
- Color: Warm white, Natural white, Cool white
- CCT: 2700K, 3000K, 4000K, 6000K
- CRI: Ra80
- Housing color: White, Black
- Housing material: Aluminum
- Warranty: 3 Years
- Installation: Recessed

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Cut size	Beam Angle
SNS-DL303R-12W	1pc COB	12W	1320Lm	110V/220VAC	Ø85*H80mm	Ø75mm	24°
SNS-DL303S-12W	1pc COB	12W	1320Lm	110V/220VAC	L85*W85*H80mm	75*75mm	24°
SNS-DL303S-2X12W	2pcs COB	24W	2640Lm	110V/220VAC	L170*W85*H80mm	160*75mm	24°

Features:

- Use high quality COB LED
- Anti-glare design
- Input voltage: AC110-130V or AC220-240V
- Color: Warm white, Natural white, Cool white
- CCT: 2700K, 3000K, 4000K, 6000K
- CRI: Ra80
- Housing color: White
- Reflector cup: White, Black
- Housing material: Aluminum
- Warranty: 3 Years
- Installation: Recessed

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Cut size	Beam Angle
SNS-DL101-12W	1pc COB	12W	960Lm	110V/220VAC	Ø85*H50mm	Ø75mm	24°
SNS-DL101-20W	1pc COB	20W	1600Lm	110V/220VAC	Ø108*H64mm	Ø95mm	24°
SNS-DL101-30W	1pc COB	30W	2400Lm	110V/220VAC	Ø130*H77mm	Ø115mm	24°

Features:

- Use high quality COB LED
- Anti-glare design
- Lighting effect: 80Lm/W
- Input voltage: AC110-130V or AC220-240V
- Color: Warm white, Natural white, Cool white
- CCT: 2700K, 3000K, 4000K, 6000K
- CRI: Ra80
- Housing color: White
- Reflector cup: White, Black, Sliver
- Housing material: Aluminum
- Warranty: 3 Years
- Installation: Recessed

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Cut size	Beam Angle
SNS-DL202-7W	1pc COB	7W	560Lm	110V/220VAC	Ø83*H50mm	Ø75mm	36°
SNS-DL202-12W	1pc COB	12W	960Lm	110V/220VAC	Ø103*H63mm	Ø95mm	36°
SNS-DL202-18W	1pc COB	18W	1440Lm	110V/220VAC	Ø123*H74mm	Ø115mm	36°

Features:

- Use high quality COB LED
- Anti-glare design
- Lighting effect: 80Lm/W
- Input voltage: AC110-130V or AC220-240V
- Color: Warm white, Natural white, Cool white
- CCT: 2700K, 3000K, 4000K, 6000K
- CRI: Ra80
- Housing color: White
- Reflector cup: White, Black
- Housing material: Aluminum
- Warranty: 3 Years
- Installation: Recessed

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Cut size	Beam Angle
SNS-DL206-12W	1pc COB	12W	960Lm	110V/220VAC	Ø85*H50mm	Ø75mm	45°/ 60°
SNS-DL206-20W	1pc COB	20W	1600Lm	110V/220VAC	Ø108*H64mm	Ø95mm	45°/ 60°
SNS-DL206-30W	1pc COB	30W	2400Lm	110V/220VAC	Ø130*H77mm	Ø115mm	45°/ 60°

Features:

- Use high quality COB LED
- IP65 Waterproof
- Anti-glare design
- Input voltage: AC110-130V or AC220-240V
- Color: Warm white, Natural white, Cool white
- CCT: 2700K, 3000K, 4000K, 6000K
- CRI: Ra80
- Housing color: White
- Reflector cup: Black, Bright silver, Rose golden
- Housing material: Aluminum
- Warranty: 3 Years
- Installation: Recessed

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Cut size	Beam Angle
SNS-DL201-10W	1pc COB	10W	800Lm	110V/220VAC	Ø85*H55mm	Ø75mm	45°/ 60°
SNS-DL201-20W	1pc COB	20W	1600Lm	110V/220VAC	Ø105*H63mm	Ø95mm	45°/ 60°
SNS-DL201-30W	1pc COB	30W	2400Lm	110V/220VAC	Ø130*H77mm	Ø120mm	45°/ 60°

Features:

- Use high quality COB LED
- PIR motion sensor function
- Anti-glare design
- Input voltage: AC110-130V or AC220-240V
- Color: Warm white, Natural white, Cool white
- CCT: 2700K, 3000K, 4000K, 6000K
- CRI: Ra80
- Housing color: White
- Reflector cup: White, Gun black
- Housing material: Aluminum
- Warranty: 3 Years
- Installation: Recessed

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Cut size	Beam Angle
SNS-DL105-12W	1pc COB	12W	960Lm	110V/220VAC	Ø85*H50mm	Ø75mm	24°

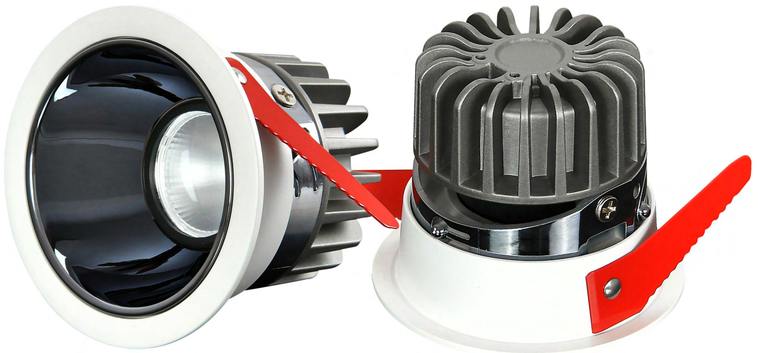

Features:

- Use high quality COB LED
- Anti-glare design
- Different reflector cup are available
- Input voltage: AC110-130V or AC220-240V
- Color: Warm white, Natural white, Cool white
- CCT: 2700K, 3000K, 4000K, 6000K
- CRI: Ra80
- Housing color: White
- Housing material: Aluminum
- Warranty: 3 Years
- Installation: Recessed

Black cup | White cup | Bright silver cup | Gun black cup | Rose golden cup | Round cup | Oval cup

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Cut size	Beam Angle
SNS-DL102-7W	1pc COB	7W	560Lm	110V/220VAC	Ø63*H70mm	Ø55mm	24°
SNS-DL102-8W	1pc COB	8W	640Lm	110V/220VAC	Ø85*H75mm	Ø75mm	24°
SNS-DL102-12W	1pc COB	12W	960Lm	110V/220VAC	Ø85*H85mm	Ø75mm	24°
SNS-DL102-15W	1pc COB	15W	1200Lm	110V/220VAC	Ø85*H100mm	Ø75mm	24°
SNS-DL102-20W	1pc COB	20W	1600Lm	110V/220VAC	Ø110*H87mm	Ø95mm	24°

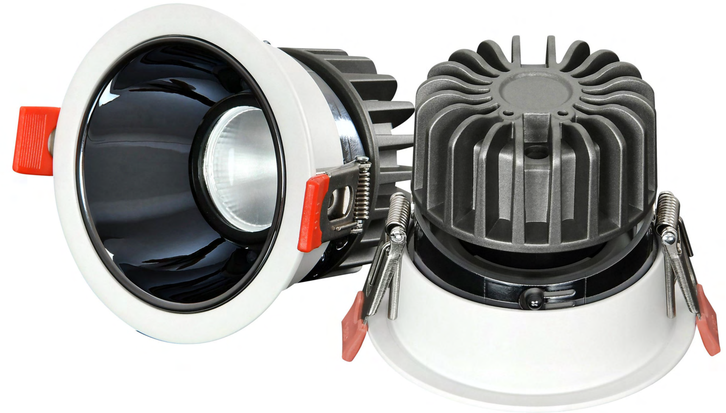

Features:

- Use high quality COB LED
- Anti-glare design
- Different reflector cup are available
- Input voltage: AC110-130V or AC220-240V
- Color: Warm white, Natural white, Cool white
- CCT: 2700K, 3000K, 4000K, 6000K
- CRI: Ra80
- Housing color: White
- Housing material: Aluminum
- Warranty: 3 Years
- Installation: Recessed

Black cup | White cup | Bright silver cup | Gun black cup | Rose golden cup | Round cup | Oval cup

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Cut size	Beam Angle
SNS-DL103-7W	1pc COB	7W	560Lm	110V/220VAC	Ø63*H70mm	Ø55mm	24°
SNS-DL103-8W	1pc COB	8W	640Lm	110V/220VAC	Ø85*H75mm	Ø75mm	24°
SNS-DL103-12W	1pc COB	12W	960Lm	110V/220VAC	Ø85*H85mm	Ø75mm	24°
SNS-DL103-15W	1pc COB	15W	1200Lm	110V/220VAC	Ø85*H100mm	Ø75mm	24°
SNS-DL103-20W	1pc COB	20W	1600Lm	110V/220VAC	Ø110*H87mm	Ø95mm	24°

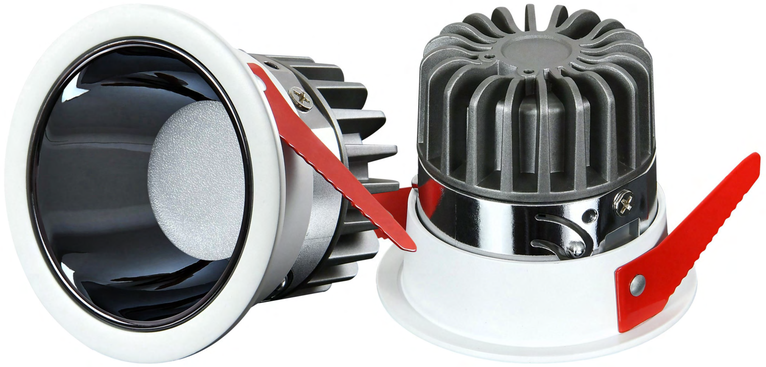

Features:

- Use high quality COB LED
- Anti-glare design
- Different reflector cup are available
- Input voltage: AC110-130V or AC220-240V
- Color: Warm white, Natural white, Cool white
- CCT: 2700K, 3000K, 4000K, 6000K
- CRI: Ra80
- Housing color: White
- Housing material: Aluminum
- Warranty: 3 Years
- Installation: Recessed

Black cup White cup Bright silver cup Gun black cup Rose golden cup

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Cut size	Beam Angle
SNS-DL204-7W	1pc COB	7W	560Lm	110V/220VAC	Ø63*H70mm	Ø55mm	45°/ 60°
SNS-DL204-8W	1pc COB	8W	640Lm	110V/220VAC	Ø85*H75mm	Ø75mm	45°/ 60°
SNS-DL204-12W	1pc COB	12W	960Lm	110V/220VAC	Ø85*H85mm	Ø75mm	45°/ 60°
SNS-DL204-15W	1pc COB	15W	1200Lm	110V/220VAC	Ø85*H100mm	Ø75mm	45°/ 60°
SNS-DL204-20W	1pc COB	20W	1600Lm	110V/220VAC	Ø110*H87mm	Ø95mm	45°/ 60°

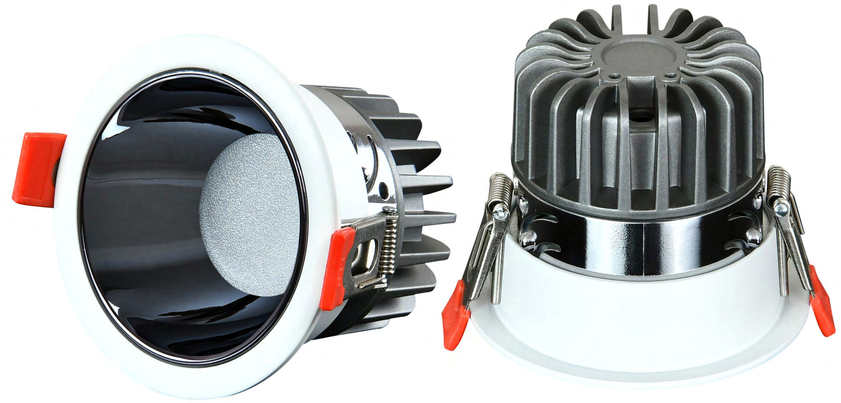

Features:

- Use high quality COB LED
- Anti-glare design
- Different reflector cup are available
- Input voltage: AC110-130V or AC220-240V
- Color: Warm white, Natural white, Cool white
- CCT: 2700K, 3000K, 4000K, 6000K
- CRI: Ra80
- Housing color: White
- Housing material: Aluminum
- Warranty: 3 Years
- Installation: Recessed

Black cup White cup Bright silver cup Gun black cup Rose golden cup

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Cut size	Beam Angle
SNS-DL205-7W	1pc COB	7W	560Lm	110V/220VAC	Ø63*H70mm	Ø55mm	45°/ 60°
SNS-DL205-8W	1pc COB	8W	640Lm	110V/220VAC	Ø85*H75mm	Ø75mm	45°/ 60°
SNS-DL205-12W	1pc COB	12W	960Lm	110V/220VAC	Ø85*H85mm	Ø75mm	45°/ 60°
SNS-DL205-15W	1pc COB	15W	1200Lm	110V/220VAC	Ø85*H100mm	Ø75mm	45°/ 60°
SNS-DL205-20W	1pc COB	20W	1600Lm	110V/220VAC	Ø110*H87mm	Ø95mm	45°/ 60°

Features:

- Use high quality COB LED
- Anti-glare design
- Different reflector cup are available
- Input voltage: AC110-130V or AC220-240V
- Color: Warm white, Natural white, Cool white
- CCT: 2700K, 3000K, 4000K, 6000K
- CRI: Ra80
- Housing color: White
- Housing material: Aluminum
- Warranty: 5 Years
- Installation: Recessed

20W 30W 40W 60W

White cup Black cup Bright silver cup

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Cut size	Beam Angle
SNS-DL104-20W	1pc COB	20W	1600Lm	110V/220VAC	Ø90*H110mm	Ø75mm	24°
SNS-DL104-30W	1pc COB	30W	2400Lm	110V/220VAC	Ø115*H127mm	Ø95mm	24°
SNS-DL104-40W	1pc COB	40W	3200Lm	110V/220VAC	Ø140*H152mm	Ø120mm	24°
SNS-DL104-60W	1pc COB	60W	4800Lm	110V/220VAC	Ø160*H168mm	Ø140mm	24°

Features:

- Use high quality COB LED
- Anti-glare design
- Different reflector cup are available
- Input voltage: AC110-130V or AC220-240V
- Color: Warm white, Natural white, Cool white
- CCT: 2700K, 3000K, 4000K, 6000K
- CRI: Ra80
- Housing color: White, Black
- Housing material: Aluminum
- Warranty: 3 Years
- Installation: Recessed

Black cup White cup Bright silver cup

Model	LED Qty	Watt	Lumen	Voltage	Dimension	Cut size	Beam Angle
SNS-DL203-7W	1pc COB	7W	560Lm	110V/220VAC	Ø70*H55mm	Ø60mm	45°
SNS-DL203-12W	1pc COB	12W	960Lm	110V/220VAC	Ø95*H75mm	Ø80mm	45°
SNS-DL203-18W	1pc COB	18W	1440Lm	110V/220VAC	Ø120*H95mm	Ø100mm	45°
SNS-DL203-24W	1pc COB	24W	1920Lm	110V/220VAC	Ø140*H105mm	Ø120mm	45°
SNS-DL203-30W	1pc COB	30W	2400Lm	110V/220VAC	Ø167*H120mm	Ø150mm	45°
SNS-DL203-40W	1pc COB	40W	3200Lm	110V/220VAC	Ø197*H140mm	Ø185mm	45°
SNS-DL203-60W	1pc COB	60W	4800Lm	110V/220VAC	Ø236*H165mm	Ø220mm	45°